
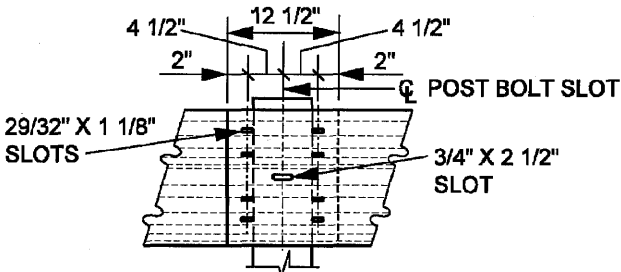


TYPICAL POST SPACING 12'-6" C TO C


**NOTES:**

1. GUARD RAIL ELEMENT MAY BE EITHER STEEL OR ALUMINUM.
2. STEEL RAIL SHALL BE GALVANIZED PER ASTM DESIGNATION A-123.
3. STEEL RAIL THICKNESS SHALL BE MIN. 12 GAUGE.
4. ALUMINUM RAIL THICKNESS SHALL BE MIN. 0.105 IN..

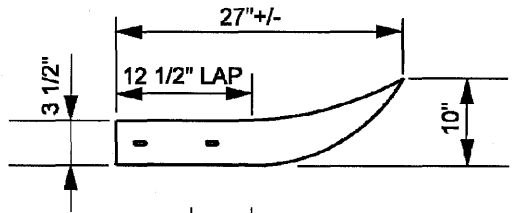


5/8" X 1 1/4" BUTTON HEAD OVAL SHOULDER BOLTS WITH 1 1/4" RECESSED HEX NUTS - TOTAL: 8 PER SPLICE AND 4 PER TERMINAL SECTION.


**RAIL SPLICE**

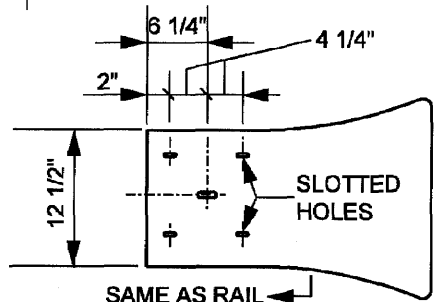

**TERMINAL SECTION**

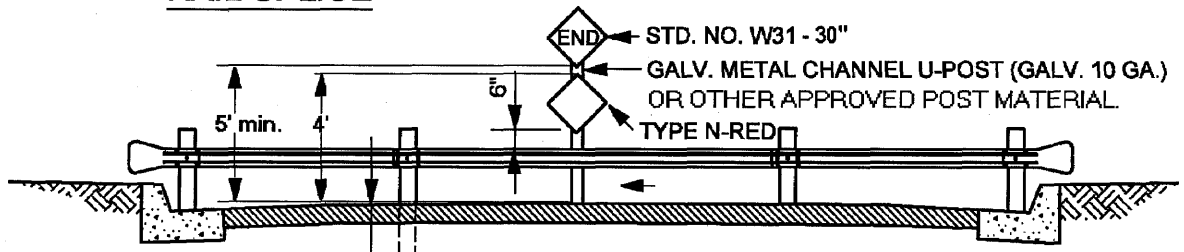


**ELEVATION**

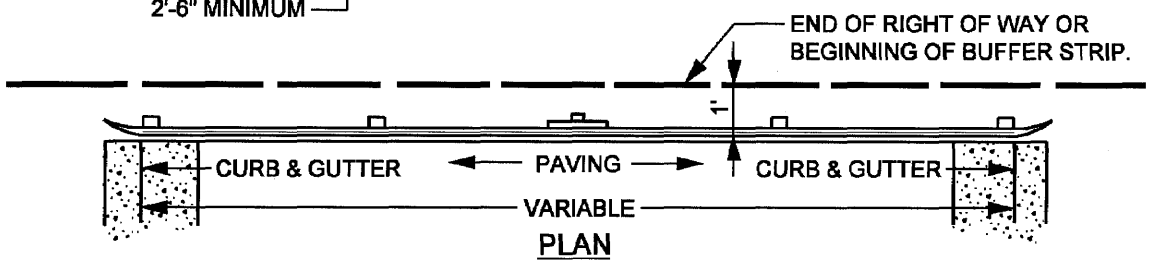

**PLAN**

R.C.T.D. STD. No. 810

**REVISIONS:**

APPROVED 08/21/01	 <p><i>City of La Quinta</i></p>	STANDARD
CHRIS A. VOGT CITY ENGINEER RCE 44250	<b>BARRICADE</b>	<b>620</b>
		SHEET 1 OF 1