


APPROVED EQUAL DRAWINGS FOR EXCLUSIVE USE WITH FACILITIES OWNED/MAINTAINED BY AGENCY NOTE HEREON:

CVWD: W-16A

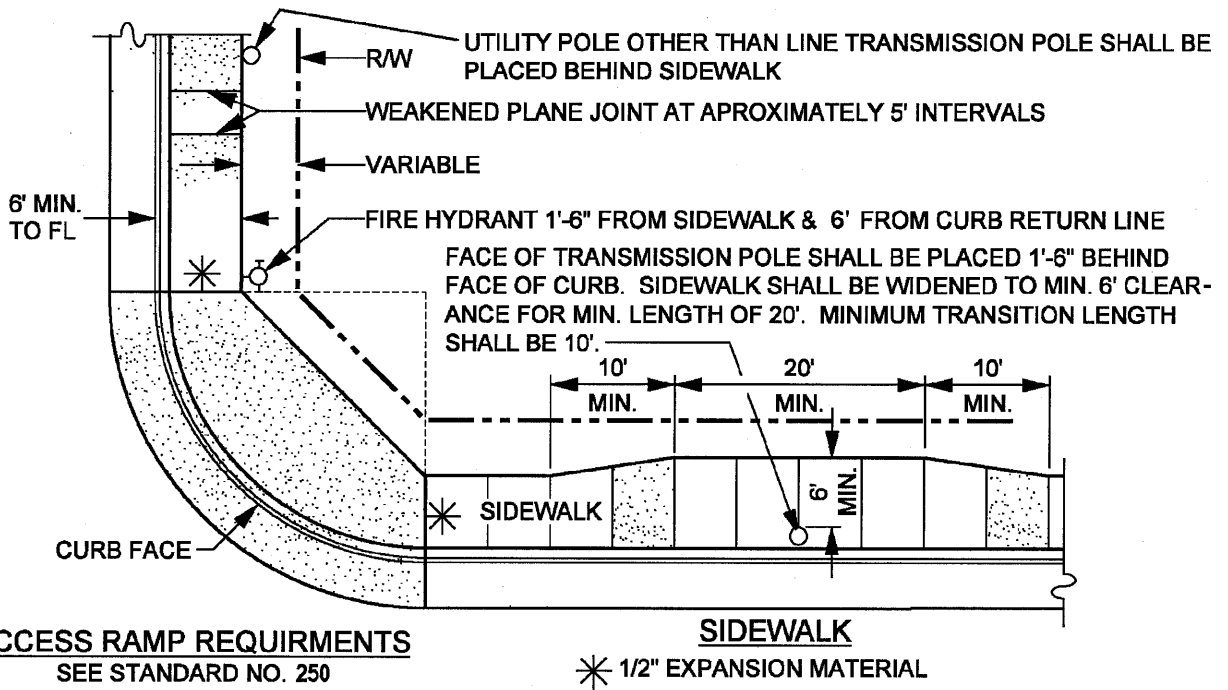

ACCESS RAMP REQUIRMENTS

SEE STANDARD NO. 250

NOTE:

1. VARIABLE DISTANCES TO BE SHOWN ON APPLICABLE TYPICAL ROAD SECTION STANDARD.
2. CONSTRUCTION TO BE OF CLASS "3" CONCRETE 4" MINIMUM THICKNESS.

R.C.T.D. STD. No. 400

REVISIONS:

APPROVED
08/21/01

CHRIS A. VOGT
CITY ENGINEER
RCE 44250



City of La Quinta

SIDEWALK, FIRE HYDRANT, & UTILITY POLE LOCATION

STANDARD

452

SHEET 1 OF 1